

Type 2 surge arrester - VAL-MS 580/3+0 - 2920450

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Surge arrester for 4-conductor power supply systems (L1, L2, L3, PEN), consisting of a base element and protective connectors, for mounting on NS 35.

Why buy this product

- ✓ With or without floating remote indication contact
- ✓ Optical, mechanical status indication for the individual arresters
- ✓ Type 2 consistent plug-in surge arresters
- ✓ Disconnect device on each individual plug
- ✓ Mechanical coding of all slots
- ✓ Multi-channel type 2 arresters



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 STK |
| GTIN |  4 046356 163675 |
| GTIN | 4046356163675 |

Technical data

Dimensions

| | |
|------------------|---------------------------------|
| Height | 89.8 mm |
| Width | 53.4 mm |
| Depth | 65.7 mm (incl. DIN rail 7.5 mm) |
| Horizontal pitch | 3 Div. |

Ambient conditions

| | |
|---|---|
| Degree of protection | IP20 (only when all terminal points are used) |
| Ambient temperature (operation) | -40 °C ... 80 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Altitude | ≤ 2000 m (amsl (above mean sea level)) |

Type 2 surge arrester - VAL-MS 580/3+0 - 2920450

Technical data

Ambient conditions

| | |
|----------------------------------|---|
| Permissible humidity (operation) | 5 % ... 95 % |
| Shock (operation) | 25g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z) |
| Vibration (operation) | 5g (10 ... 500 Hz / 2.5 h / X, Y, Z) |

General

| | |
|--|---|
| IEC test classification | II |
| | T2 |
| EN type | T2 |
| IEC power supply system | TN-C |
| | IT |
| Mode of protection | L-PE |
| | L-PEN |
| Mounting type | DIN rail: 35 mm |
| Color | jet black RAL 9005 |
| Housing material | PA 6.6 |
| | PBT |
| Degree of pollution | 2 |
| Distance between live and grounded parts | 5 mm |
| Flammability rating according to UL 94 | V-0 |
| Type | DIN rail module, two-section, divisible |
| Number of positions | 3 |
| Surge protection fault message | optical |

Additional descriptions

| | |
|------|--|
| Note | Usable in all low-voltage systems between L-N or L-PEN. Only usable in IT Systems between L-PE, if the exposed-conductive-parts (bodies) of the equipment of the low-voltage installation is connected to the earthing arrangement of the transformer substation. (interconnected earthing arrangement of the HV-transformer substation with the bodies of the LV-installation. $R_E = R_A$ accordance to IEC 60364-4-442 / VDE 0100-442 Fig. 44D / Example a) |
|------|--|

Protective circuit

| | |
|---|---------------------|
| Nominal voltage U_N | 400/690 V AC (TN-C) |
| | 500 V AC (IT) |
| Nominal frequency f_N | 50 Hz (60 Hz) |
| Maximum continuous voltage U_C | 580 V AC |
| Rated load current I_L | 80 A |
| Residual current I_{PE} | ≤ 0.75 mA |
| Standby power consumption P_C | ≤ 450 mVA |
| Nominal discharge current I_n (8/20) μs | 15 kA |
| Maximum discharge current I_{max} (8/20) μs | 30 kA |
| Short-circuit current rating I_{SCCR} | 25 kA |
| Voltage protection level U_p | ≤ 2.5 kV |

Type 2 surge arrester - VAL-MS 580/3+0 - 2920450

Technical data

Protective circuit

| | |
|---|-------------------------------------|
| Residual voltage U_{res} | ≤ 2.5 kV (at I_n) |
| | ≤ 2.3 kV (at 10 kA) |
| | ≤ 2.1 kV (at 5 kA) |
| | ≤ 1.9 kV (at 3 kA) |
| TOV behavior at U_T | 690 V AC (5 s / withstand mode) |
| | 762 V AC (120 min / withstand mode) |
| Response time t_A | ≤ 25 ns |
| Max. backup fuse with V-type through wiring | 80 A (gG) |
| Max. backup fuse with branch wiring | 125 A (gG) |

Connection data

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Screw thread | M5 |
| Tightening torque | 3 Nm (1,5 mm ² ... 16 mm ²) |
| | 4.5 Nm (25 mm ² ... 35 mm ²) |
| Stripping length | 16 mm |
| Conductor cross section flexible | 1.5 mm ² ... 25 mm ² |
| Conductor cross section solid | 1.5 mm ² ... 35 mm ² |
| Conductor cross section AWG | 15 ... 2 |
| Connection method | Fork-type cable lug |
| Conductor cross section flexible | 1.5 mm ² ... 16 mm ² |

UL specifications

| | |
|---|--------------|
| SPD Type | 4CA |
| Maximum continuous operating voltage MCOV (L-L) | 1160 V AC |
| Maximum continuous operating voltage MCOV (L-G) | 580 V AC |
| Nom. voltage | 400/690 V AC |
| Mode of protection | L-L |
| | L-G |
| Power distribution system | 3D |
| Nominal frequency | 50/60 Hz |
| Measured limiting voltage MLV (L-L) | 4270 V |
| Measured limiting voltage MLV (L-G) | 2310 V |
| Nominal discharge current I_n (L-L) | 10 kA |
| Nominal discharge current I_n (L-G) | 10 kA |

UL connection data

| | |
|-----------------------------|-------------------------|
| Conductor cross section AWG | 10 ... 2 |
| Tightening torque | 30 lb _r -in. |

Standards and Regulations

| | |
|-----------------------|-------------------|
| Standards/regulations | IEC 61643-11 2011 |
| | EN 61643-11 2012 |

Type 2 surge arrester - VAL-MS 580/3+0 - 2920450


Technical data

Environmental Product Compliance


| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Dimensional drawing

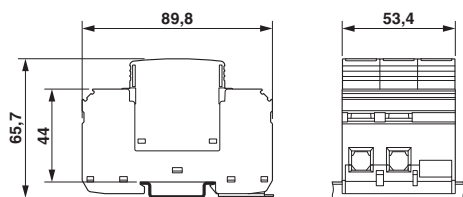

Circuit diagram



Approvals

Approvals

Approvals

UL Recognized / KEMA-KEUR / ÖVE / cUL Recognized / CCA / IECEE CB Scheme / EAC / CSA / cULus Recognized

Ex Approvals

Approval details

| | | | |
|---------------|--|---|---------------|
| UL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 330181 |
|---------------|--|---|---------------|



| | | | |
|-----------|--|---|------------|
| KEMA-KEUR | | http://www.dekra-certification.com | 2170208.01 |
|-----------|--|---|------------|

| | | | |
|-----|--|---|--------------|
| ÖVE | | https://www.ove.at/en/certification-pz/certification-register/ | 18583-001-13 |
|-----|--|---|--------------|

| | | | |
|----------------|--|---|---------------|
| cUL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 330181 |
|----------------|--|---|---------------|

Type 2 surge arrester - VAL-MS 580/3+0 - 2920450

Approvals

| | | | |
|------------------|--|---|-------------------------|
| CCA | | | NTR-AT 1947-A |
| IECEE CB Scheme |  | http://www.iecee.org/ | AT 2905/M1 |
| EAC |  | | RU C- DE.A*30.B01561 |
| CSA |  | http://www.csagroup.org/services-industries/product-listing/ | 13631 |
| cULus Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | |

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>